



HAVENWOOD GAS FIRE TABLE


with 12" x 24" Linear Crystal Fire® Plus Manual

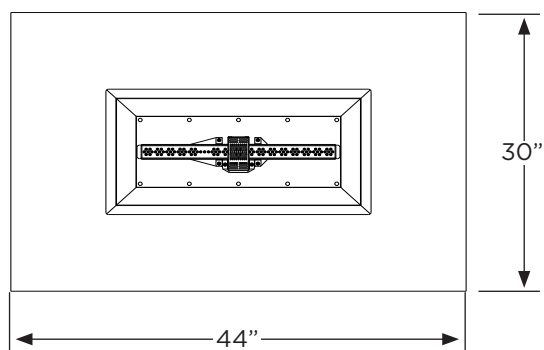


TOP VIEW

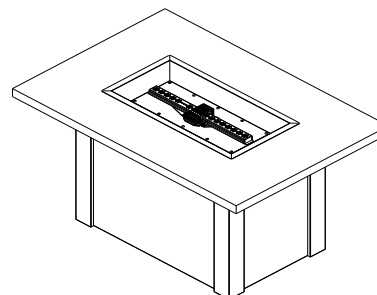

ISOMETRIC VIEW

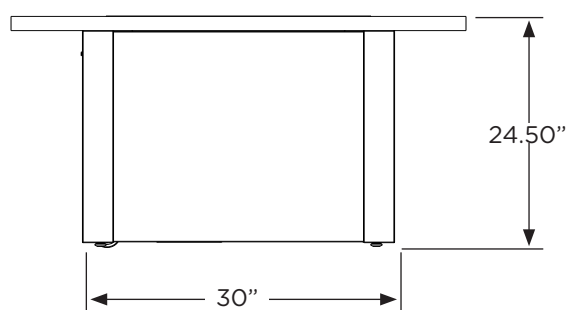

FRONT VIEW

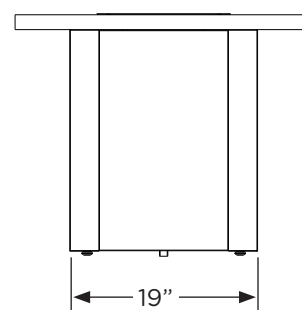

RIGHT VIEW

ITEM CODE	WEIGHT (lbs.)	RATE (BTU/hr.)	FIRE MEDIA (lbs.)	BURNER
HWADG-1224-K	110	55,000 (LP) 55,000 (NG)	10	CFP1224
HWADW-1224-K				
HWADB-1224-K				
HWAGG-1224-K				
HWAGW-1224-K				
HWAGB-1224-K				

Technical Specifications:

1. CLEARANCE TO COMBUSTIBLES

- 72" from top of burner to any overhead combustible material. 24" from edge of burner trim to any combustible side wall materials. Keep combustible materials out of structure.

2. GAS SUPPLY

- Natural gas - operating supply pressure: min 6" WC; max 10.5"; IDEAL 7" WC
- Liquid propane - operating supply pressure: min 8" WC; max 14" WC; IDEAL 11" WC

3. CONTROLS

- Controls located on appliance structure.
- Thermocouple safety valve (VCSV-S) and sparker

4. BURNER LISTING

- Standard - ANSI Z21.97-2017/CSA 2.41-2017 Outdoor Decorative Gas Appliances
- Testing agency - Underwriters Laboratories (UL LLC)

Included: base, top, burner, glass burner cover, clear glass gems (10 lbs.), natural gas conversion kit

Optional accessories: glass wind guard (GG-1224), folding glass wind guard (FWG-1224), protective cover (CVR4634), other burner media options